

SC075N120Y4

33 Amps, 1200 Volts N-Channel Sic Power MOSFET

Features

- 33A,1200V, $R_{DS(ON)MAX}=95\text{m}\Omega$ @ $V_{GS}=18\text{V}/20\text{A}$
- High Blocking Voltage with low On-Resistance
- High Speed Switching with Low Capacitance
- Easy to Parallel and Simple to Drive



Benefits

- Higher System Efficiency
- Reduced Cooling Requirements
- Increased Power Density
- Increased System Switching Frequency

Applications

- Renewable Energy
- EV Battery Chargers
- High Voltage DC/DC Converters
- Switch Mode Power Supplies

TO-247-4L

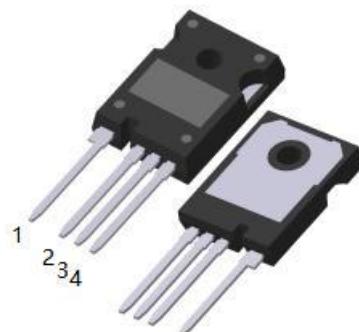

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Value	UNIT	Test Conditions
Drain-Source Voltage	V_{DSmax}	1200	V	$V_{GS}=0\text{V}, I_{DS}=100\mu\text{A}$
Gate-Source Voltage(dynamic)	V_{GSmax}	-8/+22		Absolute maximum values
Gate-Source Voltage (static)	V_{GSop}	-4/+18		Recommended operational values
Continuous Drain Current	I_D	33	A	$V_{GS}=18\text{V}, T_c=25^\circ\text{C}$
		23.8		$V_{GS}=18\text{V}, T_c=100^\circ\text{C}$
Pulsed Drain Current	$I_{D(pulse)}$	80	A	Pulse width t_p limited by T_{Jmax}
Power Dissipation	P_D	136	W	$T_c=25^\circ\text{C}, T_J=150^\circ\text{C}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +175	°C	

Thermal Characteristics

Parameter	Symbol	SC075N120Y4	Units
Maximum Junction-to-Case	R_{thJC}	0.84	°C/W

Electrical Characteristics (T_c=25°C,unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V,I _D =100uA	1200	—	—	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =1200V,V _{GS} =0V	—	1	100	μA
Gate-Body Leakage Current,Forward	I _{GSSF}	V _{GS} =22V,V _{DS} =0V	—	10	250	nA
Gate-Body Leakage Current,Reverse	I _{GSRR}	V _{GS} =-8V,V _{DS} =0V	—	10	250	nA
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} ,I _D =5mA	1.9	2.6	4.0	V
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =18V,I _D =20A	—	75	95	mΩ
		V _{GS} =18V,I _D =20A,T _j =175°C	—	120	—	
Input Capacitance	C _{iss}	V _{DS} =1000V, V _{GS} =0V, f=1.0MHZ, V _{AC} =25mV	—	1200	—	pF
Output Capacitance	C _{oss}		—	63	—	pF
Reverse Transfer Capacitance	C _{rss}		—	9.8	—	pF
Coss Stored Energy	E _{oss}		—	41	—	uJ
Turn-On Delay Time	t _{d(on)}	V _{DS} =800V,V _{GS} =-4V/18V, I _D =20A,R _g =2.5Ω,R _L =20Ω	—	13	—	ns
Turn-On Rise Time	t _r		—	12	—	ns
Turn-Off Delay Time	t _{d(off)}		—	16	—	ns
Turn-Off Fall Time	t _f		—	10	—	ns
Turn-On Switching Energy	E _{ON}	V _{DS} =800V,V _{GS} =-4V/18V I _D =20A,R _g =2.5Ω,L=100uH	—	586	—	uJ
Turn-Off Switching Energy	E _{OFF}		—	273	—	uJ
Internal Gate Resistance	R _G	f=1MHz, V _{AC} =25mV	—	5.5	—	Ω
Total Gate Charge	Q _g	V _{DS} =800V,I _D =20A, V _{GS} =-4V/18V	—	68.1	—	nC
Gate-Source Charge	Q _{gs}		—	21.5	—	
Gate-Drain Charge	Q _{gd}		—	14.6	—	

Reverse Diode Characteristics

Diode Forward Voltage	V _{SD}	V _{GS} =-4V, I _{SD} =10A	—	4.2	—	V
		V _{GS} =-4V, I _{SD} =10A, T _j =175°C	—	3.8	—	
Continuous Diode Forward Current	I _S	T _c =25°C	—	—	33	A
Reverse Recover Time	t _{rr}	V _R =800V, I _{SD} =20A	—	28	—	ns
Reverse Recovery Charge	Q _{rr}		—	62	—	nc
Peak Reverse Recovery Current	I _{rrm}		—	3.7	—	A

RATING AND CHARACTERISTIC CURVES

Figure.1 Output Characteristics $T_j=25^\circ\text{C}$

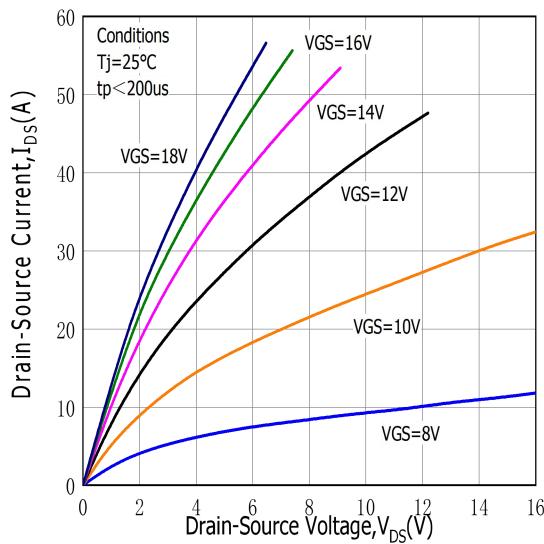


Figure.3 On-Resistance vs.Temperature

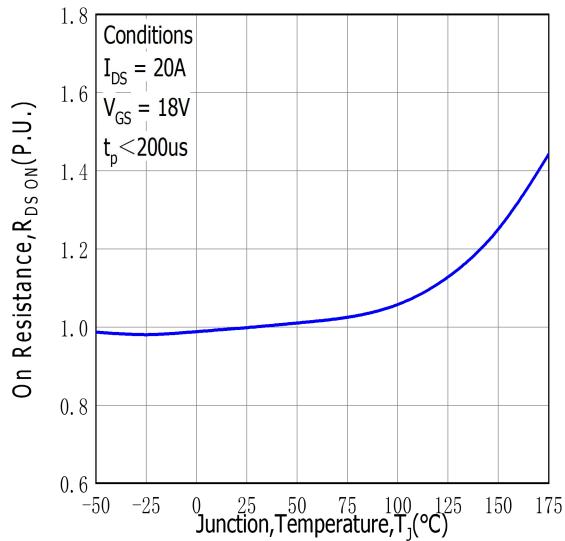


Figure.5 On-Resistance vs.Temperature for Various Gate Voltage

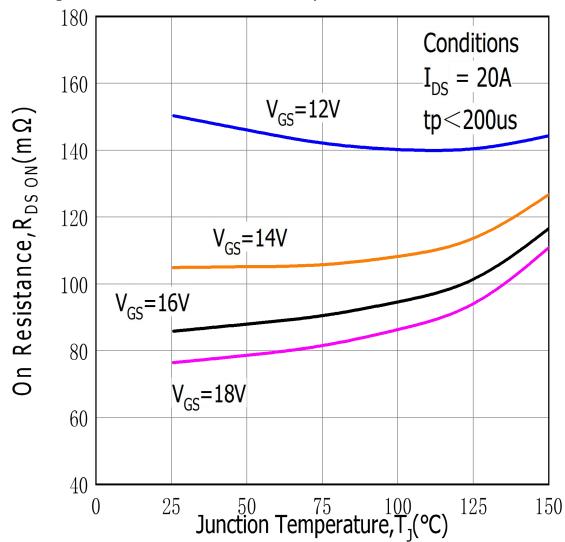


Figure.2 Output Characteristics $T_j=175^\circ\text{C}$

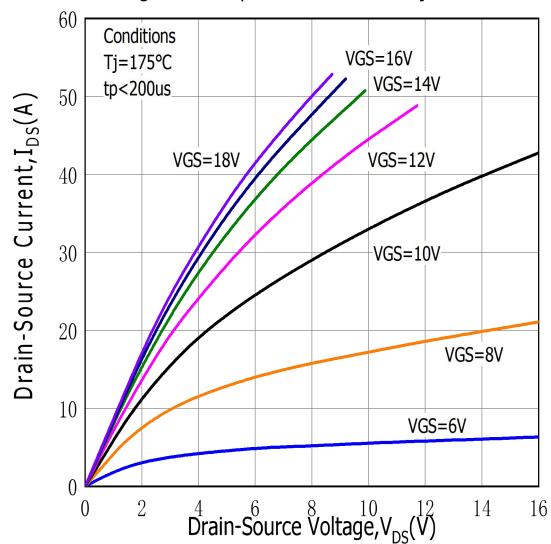


Figure.4 On-Resistance vs.Drain Current for Various Temperatures

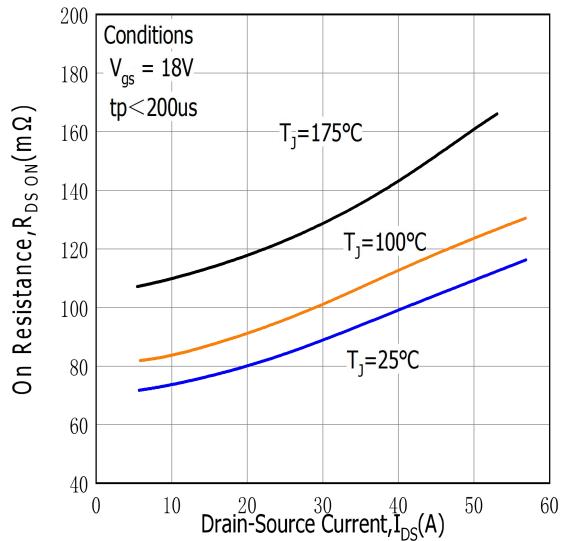


Figure.6 Transfer Characteristic for Various Junction Temperatures

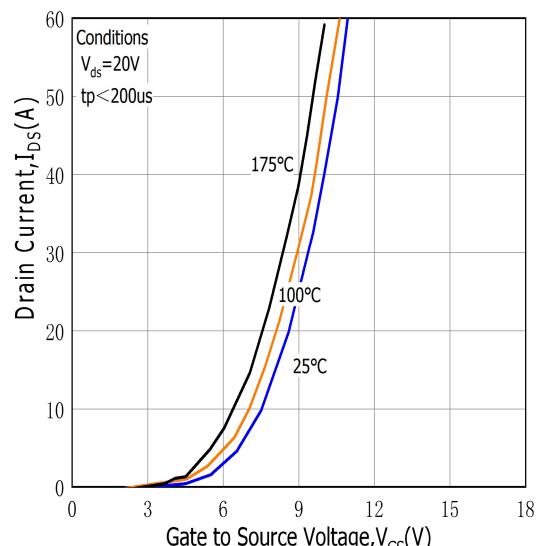


Figure.7 Body Diode Characteristic at 25°C

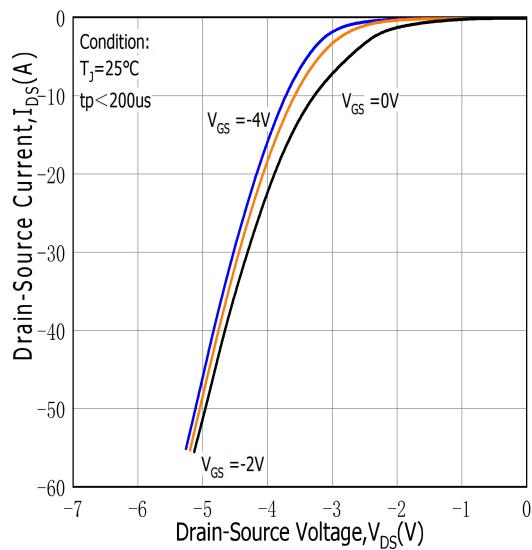


Figure.8 Body Diode Characteristic at 175°C

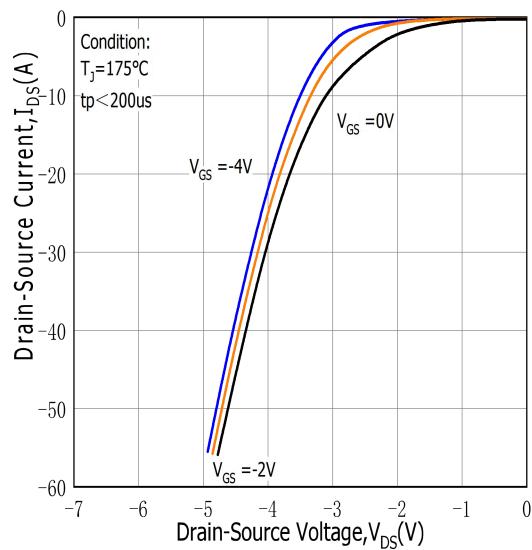


Figure.9 Threshold Voltage vs.Temperature

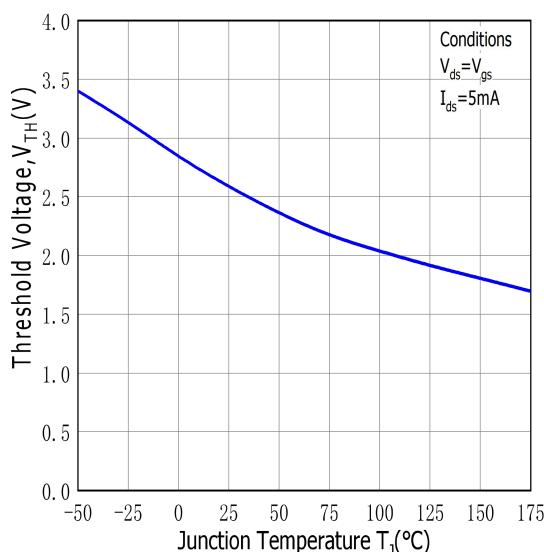


Figure.10 Gate Charge Characteristics

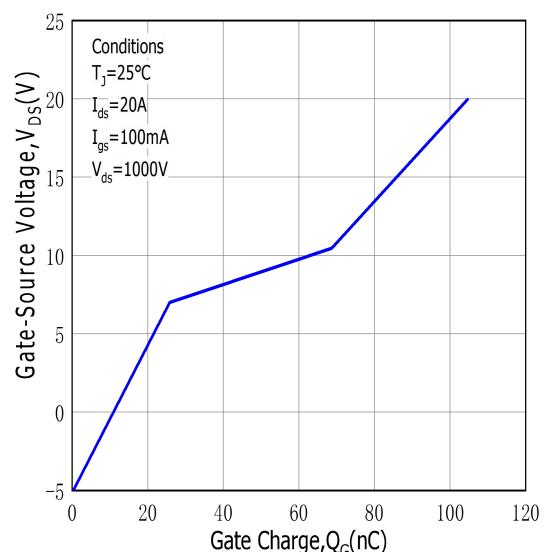


Figure.11 3rd Quadrant Characteristic at 25°C

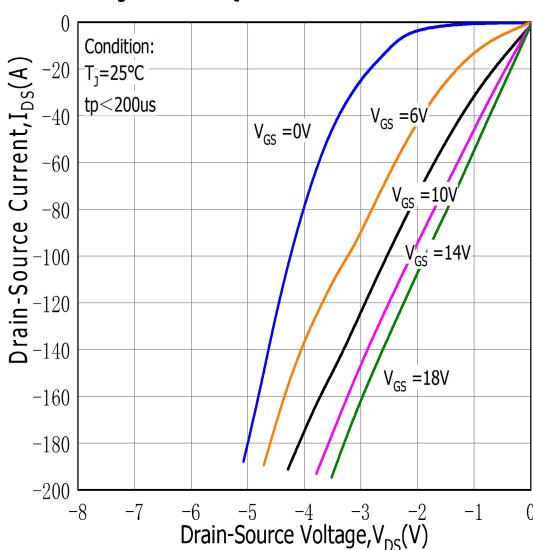


Figure.12 3rd Quadrant Characteristic at 175°C

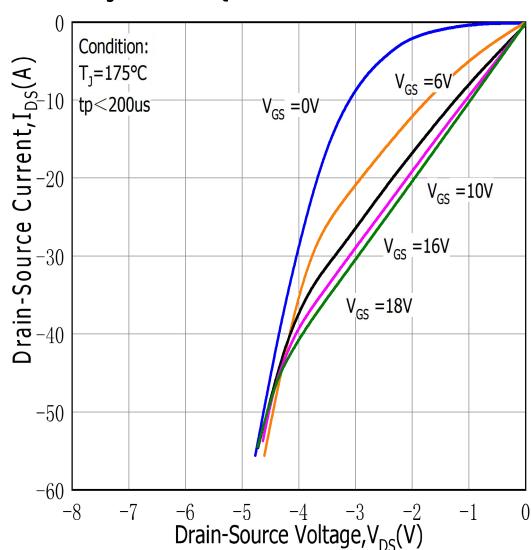


Figure.13 Capacitances vs. Drain-Source Voltage(0-200V)



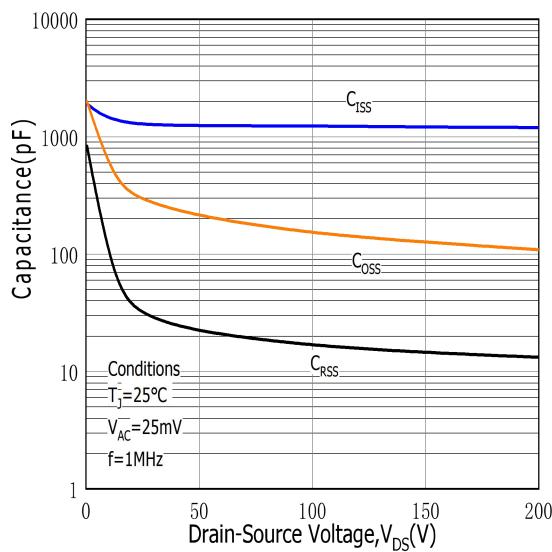



Figure.14 Capacitances vs. Drain-Source Voltage(0-1000V)

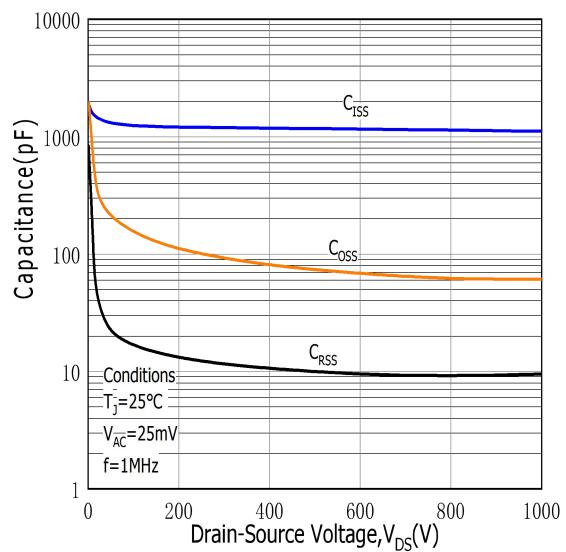

TO-247-4L PACKAGE OUTLINE

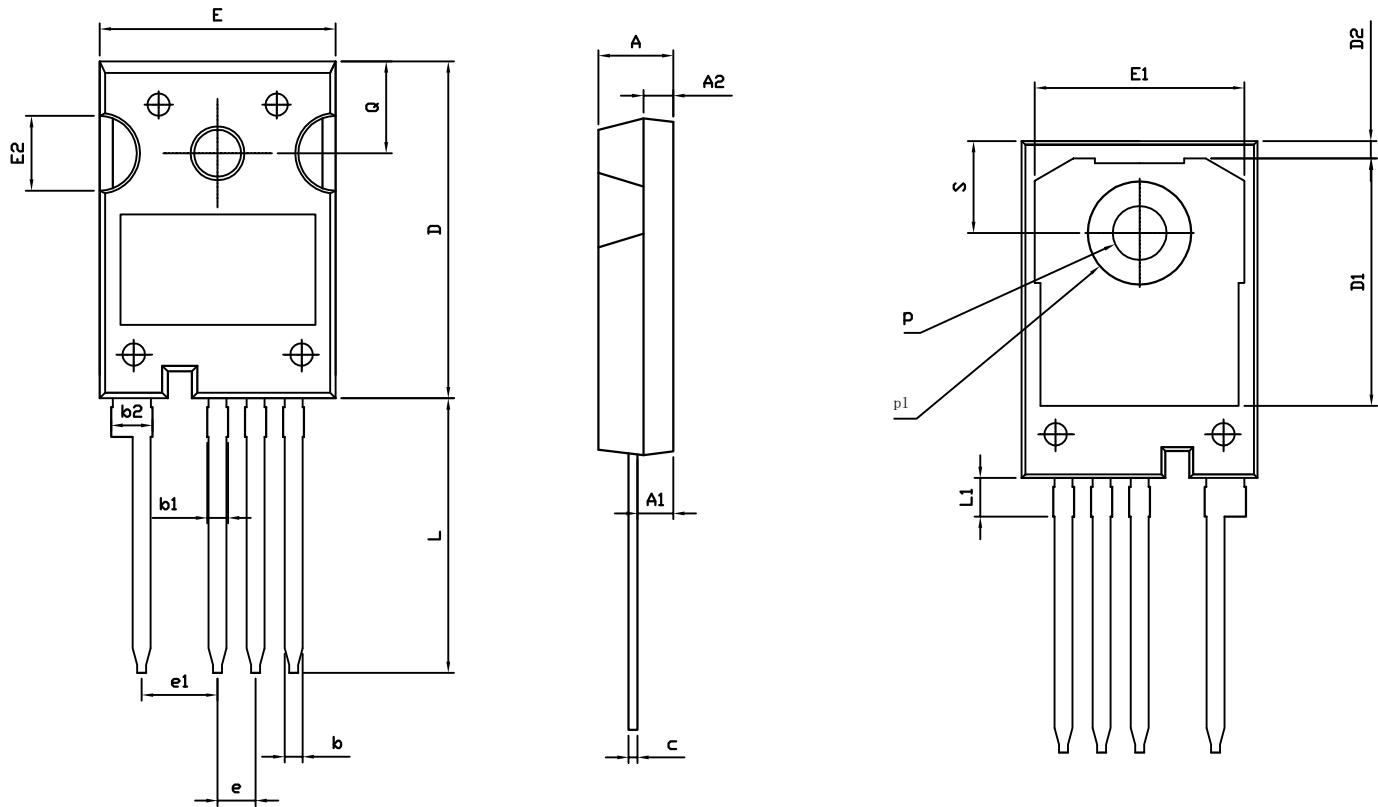

RECOMMENDED LAND PATTERN

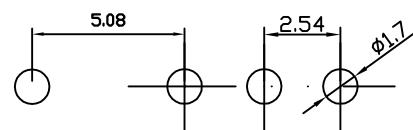

UNIT: mm

	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.25	2.40	2.45
A2	1.85	2.00	2.15
b	1.05	1.20	1.35
b1	1.00	1.30	1.60
b2	2.35	2.65	2.95
c	0.50	0.60	0.70
D	22.34	22.54	22.74
D1	16.00	16.50	17.00
D2	0.97	1.17	1.37
e	2.34	2.54	2.74
e1	4.88	5.08	5.28
E	15.60	15.80	16.00
E1	13.50	14.00	14.50
E2	4.80	5.00	5.20
L	18.08	18.38	18.68
L1	2.38	2.58	2.78
p	3.50	3.60	3.70
p1	6.60	6.80	7.00
Q	6.00	6.15	6.30
S	6.00	6.15	6.30